




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: A61M 25/02	A1	(11) International Publication Number: WO 99/56814 (43) International Publication Date: 11 November 1999 (11.11.99)
(21) International Application Number: PCT/US99/07867 (22) International Filing Date: 9 April 1999 (09.04.99) (30) Priority Data: 09/070,269 30 April 1998 (30.04.98) US (71) Applicant: MEDTRONIC, INC. [US/US]; 7000 Central Avenue N.E., Minneapolis, MN 55432 (US). (72) Inventor: HARPER, Derek, J.; 1268 Catarina Street, Santa Ynez, CA 93460 (US). (74) Agents: KINGHORN, Curtis, D. et al.; Medtronic, Inc., 7000 Central Avenue N.E., MS301, Minneapolis, MN 55432 (US).		(81) Designated States: European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: A DEVICE USED TO CONNECT AN EXTERNAL VENTRICULAR DRAINAGE CATHETER

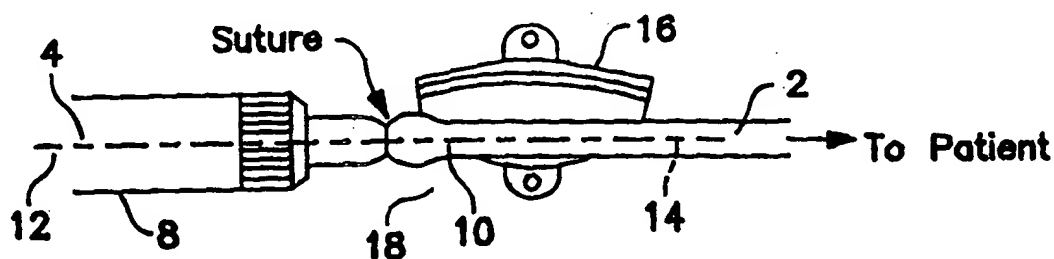

(57) Abstract

A luer connector is described that is angled away from the patient's scalp in the direction of the drip assembly line. In the preferred embodiment, the luer connector has a female luer connector that mates with a male luer connector on the drip assembly line. The luer connector also has a hollow protrusion that extends into a catheter thereby allowing the luer connector to be fluidly connected to the catheter. A fluid passage is formed through the angled luer connector from the female luer connector, through the body of the angled luer connector and through the hollow protrusion. The luer connector has a pair of "wings" that extend outwardly from the luer connector and allow the luer connector to be sutured to the patient's scalp.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

2

"collar" 16 is wrapped around the silicone catheter 2. A portion of the luer connector 8 extends into the catheter 2. Collar 16 is sutured to the patient's scalp 18. The stickiness of the two silicone pieces, catheter 2 and collar 16, keeps the catheter 2 from moving relative to the collar 16.

5 The axis 12 of luer connector 8 may run parallel to the patient's scalp 18 making it difficult to connect the drip assembly line 4 to the luer connector 8. This problem occurs because there is no clearance between the luer connector 8 and the patient's scalp 18. In addition, because there are separate elements for luer connector 8 and collar 16, additional time is required to separately configure the luer connector 8 and collar 16. Further, these types of prior art connectors rely on the inherent
10 stickiness of the silicone to silicone contact to maintain the relative positions of the catheter 2 and the collar 16. It is possible that this inherent stickiness may be compromised in an operating room environment. These are problems in want of a solution.

Summary of the Invention

15 A luer connector is described that is angled away from the patient's scalp in the direction of the drip assembly line. In the preferred embodiment, the luer connector has a female luer connector that mates with a male luer connector on the
20 drip assembly line. The luer connector also has a hollow protrusion that extends into a catheter thereby allowing the luer connector to be fluidly connected to the catheter. A fluid passage is formed through the angled luer connector from the female luer

A DEVICE USED TO CONNECT AN EXTERNAL VENTRICULAR DRAINAGE CATHETER

Field of the Invention

5 This invention relates to a device for connecting a catheter to tubing for draining excess cerebrospinal fluid from the brain.

Description of Related Art

10 It is common medical practice to drain excess cerebrospinal fluid from the brain in cases of hydrocephelus or trauma to the brain. This is commonly done by inserting a catheter into the ventricles of the brain by a process called a ventriculostomy. The catheter is typically made of silicone. An example of such a catheter is the model 46118 EDM Ventricular Catheter sold by Medtronic-PS Medical of Goleta, California. Excess cerebrospinal fluid is drained through the catheter into a flexible drip assembly line where it is collected and measured in a drip assembly
15 system.

 The catheter is connected to the drip assembly line outside the skull of the patient away from the opening placed in the skull for the catheter to pass. An example of such a drip assembly is the model 46128 Becker EDMS Assembly External Drainage and Monitoring System sold by Medtronic-PS Medical of Goleta,
20 California.

 As shown in Figure 1, to fix the catheter 2 to the patient's skull, the catheter 2 is typically connected to the drip assembly line 4 of the drip assembly 6 through a luer connector 8 that extends a distance into an inner lumen 10 of catheter 2. The luer connector 8 has an axis 12 that is aligned with the axis 14 of the catheter 2. A silicone

connector, through the body of the angled luer connector and through the hollow protrusion. The luer connector has a pair of "wings" that extend outwardly from the luer connector and allow the luer connector to be sutured to the patient's scalp.

It is a primary object of the present invention to provide a luer connector for connecting a catheter to a drip assembly line that allows the medical practitioner to easily and reliably connect the drip assembly line to the catheter connector.

It is another object of the present invention to provide a luer connector for connecting a catheter to a drip assembly line that consolidates the features of a luer connector and a collar into a single unit.

These and other object of the present invention will be clear with reference to the description contained herein and more particularly with reference to the following detailed description of the invention and the accompanying drawings. Throughout the description, like elements are referred to by like reference numbers.

Brief Description of the Drawings

Figure 1 is a top view of a prior art collar and luer connector with the collar in an open position.

Figure 2 is a top view of the prior art collar and luer connector of Figure 2 with the collar of Figure 1 in a closed position around the catheter.

Figure 3 is a perspective view of the prior art collar and luer connector of Figure 2.

Figure 4 is a perspective view of the angled luer connector of the present invention.

Figure 5 is a side view of the angled luer connector of Figure 4.

Figure 6 is a cross-sectional side view of the luer connector of Figure 4.

5 Figure 7 is an end view of the angled luer connector of Figure 4.

Figure 8 is an end view of the angled luer connector of Figure 4.

Figure 9 is a bottom view of the angled luer connector of Figure 4.

Detailed Description of the Invention

10 The angled luer connector is shown in the Figures generally labeled 20.

Angled luer connector 20 includes a central hollow barrel 22 having a barrel lumen 24. Barrel 22 has a barrel axis 26 that is coaxial with barrel lumen 24.

A hollow catheter connection protrusion 28 is attached to and extends away from barrel 22. Catheter connection protrusion 28 has a protrusion lumen 30 that
15 extends through catheter connection protrusion 28. In the preferred embodiment, protrusion lumen 30 is coaxial with barrel lumen 24. Catheter connection protrusion 28 has an outside diameter that allows it to be firmly inserted into the inner lumen 10 of catheter 2. To more firmly seat catheter connection protrusion 28 within the inner lumen 10 of catheter 2, a bulbous end 32 is formed on the end of catheter connection
20 protrusion 28. Bulbous end 32, at its greatest diameter, has a slightly larger diameter than the majority of catheter connection protrusion 28.

Angled luer connector 20 has a pair of substantially planar, wing-like anchoring protrusions 34a,b that extend away from barrel 22. Together, anchoring protrusions 34a,b form a substantially planar platform 36 to contact the patient's scalp 18. This prevents the angled luer connector 20 from rotating about the axis 26 and firmly locates the angled luer connector 20 on the patient's scalp 18. Each anchoring protrusion 34 has a suture hole 38 that allows the anchoring protrusions 34a,b, and consequently the angled luer connector 20, to be firmly anchored to the patient's scalp 18.

A female luer connector 40 is attached to barrel 22 opposite protrusion 28.

Female luer connector 40 has a female luer axis 42 that is not coaxial with axis 26. In the preferred embodiment, axis 42 intersects axis 26 at an angle of about 30°. The 30° angle between axis 42 and axis 26 is oriented so that axis 42 also forms about a 30° angle to the substantially planar platform 36. In this way, when angled luer connector 20 is sutured to a patient's scalp 18 as described below, female luer connector 40 is directed away from the patient's scalp 18.

In the preferred embodiment, female luer axis 42 is equidistant from each of the anchoring protrusions 34a,b. However, in an alternate embodiment, female luer axis 42 may be rotated around its intersection with barrel axis 26 so that it is closer to one of the anchoring projections 34a,b than the other.

Although the preferred angle between central axis 42 and axis 26 is about 30°, any angle between central axis 42 and axis 26 that allows female luer connector 40 to be directed away from the patient's scalp 18 is within the invention. In particular, it is

anticipated that an angle as low as 15° or as high as 90° between central axis 42 and axis 26 is within the scope of the invention.

Female luer connector 40 is threaded and allows a male luer connector of corresponding threads to be mated with female luer connector 40 as is well understood in the art. Female luer connector 40 is in fluid communication with barrel lumen 24 so that fluid entering the female luer connector 40 through the interconnection between female luer connector 40 and a male luer connector passes into barrel lumen 24. Because female luer connector 40 is angled away from the patient's scalp as described above, the physician will be able to more easily connect the male luer connector to the female luer connector 40.

Although the preferred embodiment has a female luer connector 40 connected to barrel 22, it is also within the scope of the invention for other connectors to be attached to barrel 22 for connecting angled luer connector 20 to a drip assembly line 4. This would include replacing female luer connector 40 with a male luer connector. Of course, a female luer connector would then need to be placed on the drip assembly line 4. Other connectors and connecting systems will occur to those skilled in the art.

Preferably, angled luer connector 20 is made of a rigid thermo-plastic such as polycarbonate, polypropylene, polyoxymethylene, PET, nylon, styrene or acrylic. Alternately, angled luer connector 20 can be made of metal, ceramic or almost any other semi-rigid thermo-plastic or thermoset material.

In use, a physician will insert catheter 2 into the patient's ventricle by performing a ventriculostomy. The proximal end of catheter 2 will extend outside of

the patient's skull. The physician will insert catheter connection protrusion 28 into the inner lumen 10 of catheter 2. Bulbous end 32 assists in retaining catheter connection protrusion 28 in the inner lumen 10 of catheter 2. The physician will typically place a suture around catheter 2 and protrusion 28 to more securely hold catheter 2 in position on catheter connection protrusion 28.

Anchoring protrusions 34a,b are sutured to the patient's scalp 18 through suture holes 38. The male luer connector from the drip assembly line 4 is connected to female luer connector 40. Excess cerebrospinal fluid then passes from the ventricle, through the inner lumen 10 of catheter 2 to angled luer connector 20 where is passes to drip assembly line 4 to ultimately be collected and measured in drip assembly 6.

The invention has been described in connection with a specific embodiments. It will be clear to those skilled in the art that changes and modifications may be made to the description given herein and still fall within the scope of the invention as claimed in the following claims. Further, obvious modifications and changes to the description will occur to those skilled in the art that will still fall within the claims.

I claim:

1. A luer connector for connecting a catheter to a drip assembly comprising:

a hollow barrel having a barrel lumen, the barrel having a barrel axis that is coaxial with the barrel lumen;

a hollow catheter connection protrusion attached to and extending away from the barrel, the catheter connection protrusion having a protrusion lumen that extends through the catheter connection protrusion, the protrusion lumen being in fluid communication with the barrel lumen;

a pair of anchoring protrusions attached to and extending away from the barrel;

a female luer connector attached to the barrel opposite the catheter connection protrusion, the female luer connector having a female luer axis that is not coaxial with the barrel axis.

2. The luer connector of claim 1 wherein the female luer axis intersects the barrel axis at an angle of between 15° to 90° .

3. The luer connector of claim 2 wherein the female luer axis intersects the barrel axis at an angle of about 30° .

4. The luer connector of claim 1 wherein the pair of anchoring protrusions produce a substantially planar surface.

5. The luer connector of claim 4 wherein the female luer axis intersects the substantially planar surface.

5 6. The luer connector of claim 1 wherein the female luer axis is equidistant from each of the anchoring protrusions.

7. The luer connector of claim 1 wherein the female luer axis is closer to one of the anchoring protrusions than the other.

10 8. The luer connector of claim 1 wherein the anchoring protrusions each have a suturing hole to allow the anchoring protrusions to be attached to a patient.

15 9. The luer connector of claim 1 wherein the protrusion lumen is coaxial with the central lumen.

10. The luer connector of claim 1 wherein the protrusion has an outside diameter that of slightly larger diameter than the inner lumen of the catheter.

20 11. The luer connector of claim 1 further comprising a bulbous end formed on the end of the protrusion.

12. A luer connector for connecting a catheter to a drip assembly comprising:

a hollow barrel having a barrel lumen, the barrel having a barrel axis that is coaxial with the barrel lumen;

a hollow catheter connection protrusion attached to and extending away from the barrel, the catheter connection protrusion having a protrusion lumen that extends through the catheter connection protrusion, the protrusion lumen being in fluid communication with the barrel lumen;

a pair of anchoring protrusions attached to and extending away from the barrel, the pair of anchoring protrusions producing a substantially planar surface;

a female luer connector attached to the barrel opposite the catheter connection protrusion, the female luer connector having a female luer axis that is not coaxial with the barrel axis, the female luer axis intersecting the barrel axis at an angle of about 30°.

13. The luer connector of claim 12 wherein the female luer axis is equidistant from each of the anchoring protrusions.

14. The luer connector of claim 12 wherein the female luer axis is closer to one of the anchoring protrusions than the other.

15. The luer connector of claim 12 wherein the anchoring protrusions each have a suturing hole to allow the anchoring protrusions to be attached to a patient.

16. A luer connector for connecting a catheter to a drip assembly comprising:
a hollow barrel having a barrel lumen, the barrel having a barrel axis that is
coaxial with the barrel lumen;

5 a hollow catheter connection protrusion attached to and extending away from
the barrel, the catheter connection protrusion having a protrusion lumen that extends
through the catheter connection protrusion, the protrusion lumen being in fluid
communication with the barrel lumen;

10 a pair of anchoring protrusions attached to and extending away from the barrel,
the pair of anchoring protrusions producing a substantially planar surface, each of the
anchoring protrusions having a suturing hole to allow the anchoring protrusions to be
attached to a patient;

15 a female luer connector attached to the barrel opposite the catheter connection
protrusion, the female luer connector having a female luer axis that is not coaxial with
the barrel axis, the female luer axis intersecting the barrel axis at an angle of about
30°.

17. The luer connector of claim 16 wherein the female luer axis is equidistant
from each of the anchoring protrusions.

20 18. The luer connector of claim 16 wherein the female luer axis is closer to one of
the anchoring protrusions than the other.

19. A connector for connecting a catheter to a drip assembly comprising:
- a hollow barrel having a barrel lumen, the barrel having a barrel axis;
 - a hollow catheter connection protrusion attached to and extending away from
 - 5 the barrel, the catheter connection protrusion having a protrusion lumen that extends
 - through the catheter connection protrusion, the protrusion lumen being in fluid
 - communication with the barrel lumen;
 - means for attaching the luer connector to a patient's scalp;
 - means for fluidly connecting a drip assembly to the barrel opposite the catheter
 - 10 connection protrusion, the means for fluidly connecting having an axis that is not
 - coaxial with the barrel axis.
20. A connector for connecting a catheter to a drip assembly comprising:
- a first conduit having a first lumen, the first conduit having a first axis;
 - 15 a second conduit having a second lumen, the second lumen in fluid
 - communication with the first lumen, the second conduit having a second axis, the
 - second axis intersecting the first axis but not being coaxial with the first axis;
 - means for connecting the first conduit to the catheter;
 - means for connecting the second conduit to the drip assembly; and
 - 20 means for connecting the connector to a patient's scalp.

21. The connector of claim 20 wherein the second axis intersects the first axis at an angle of between 15° to 90°.

22. The connector of claim 21 wherein the second axis intersects the first axis at an angle of about 30°.

23. The connector of claim 20 wherein the means for connecting are a pair of anchoring protrusions extending away from the connector.

24. The connector of claim 23 wherein the pair of anchoring protrusions produce a substantially planar surface.

25. The connector of claim 24 wherein the second axis intersects the substantially planar surface.

26. The connector of claim 23 wherein the second axis is equidistant from each of the anchoring protrusions.

27. The connector of claim 23 wherein the second axis is closer to one of the anchoring protrusions than the other.

28. The connector of claim 23 wherein the anchoring protrusions each have a suturing hole to allow the anchoring protrusions to be attached to a patient.

1/2

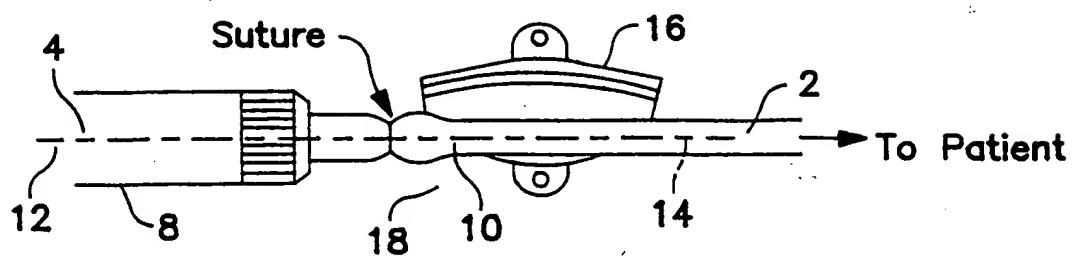


FIG. 1

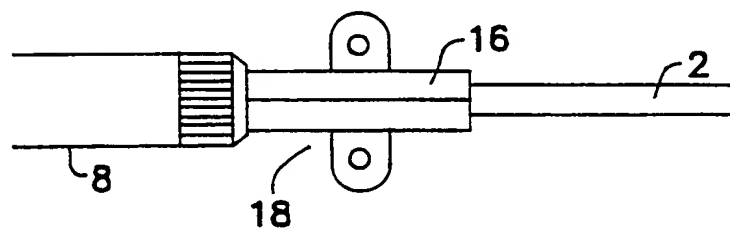


FIG. 2

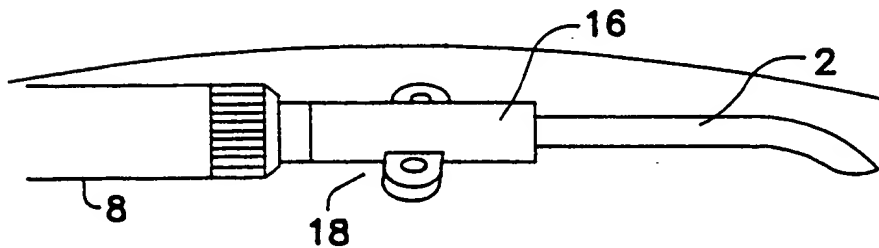


FIG. 3

THIS PAGE BLANK (USPTO)

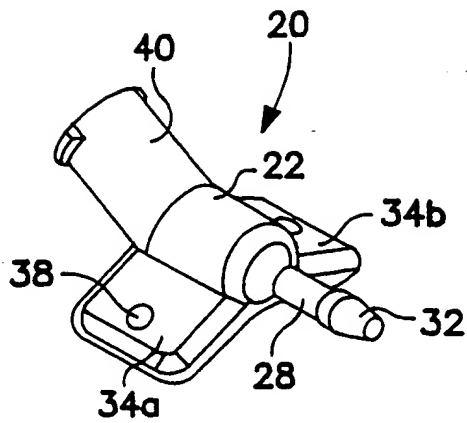


FIG. 4

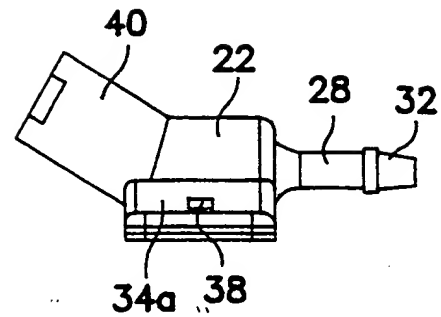


FIG. 5

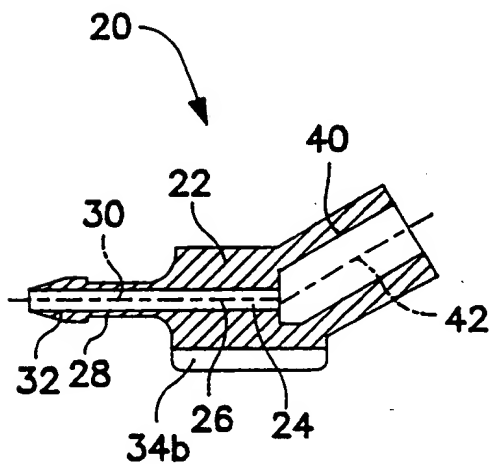


FIG. 6

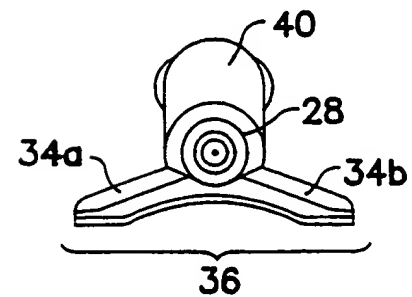


FIG. 7




FIG. 8

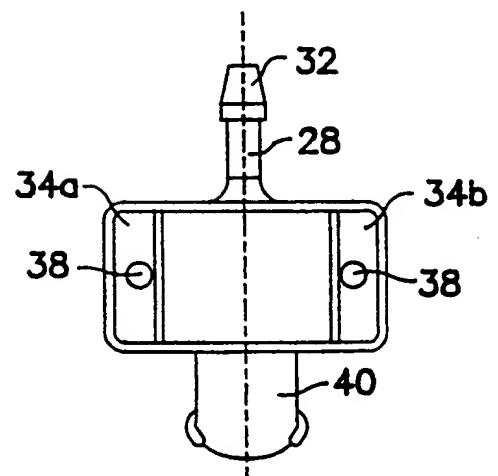


FIG. 9

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/07867

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A61M25/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 41 13 045 C (MEYER) 16 July 1992 (1992-07-16) column 3, line 57 - line 67; figures 4,5	1,2,4,6, 9,19-21, 23,24,26
A		5,10,12, 13,16,17
X	US 4 161 177 A (FUCHS) 17 July 1979 (1979-07-17) claims 1,3; figures	1,2,4-6, 9,19-21, 23-26
A		3,12,13, 16,17,22



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

31 August 1999

Date of mailing of the international search report

07/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Sedy, R

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/07867

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 3 906 946 A (NORDSTRÖM) 23 September 1975 (1975-09-23) column 5, line 3 - line 59; figures 1,2,4	1,2,4,7, 9 12,14, 16, 18-21, 23,24,27
X A	FR 1 336 357 A (B. BRAUN) 16 December 1963 (1963-12-16) page 2, right-hand column, line 21 - line 28; figure 1	19-21, 23-26 1-6,10, 12,13, 16,17,22
A	US 5 356 381 A (ENSMINGER WILLIAM D ET AL) 18 October 1994 (1994-10-18) column 14, line 45 - line 63 figures 29-31	3,4,8, 11,15, 16,22,28

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter. Appl. Application No.

PCT/US 99/07867

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 4113045	C	16-07-1992	AU 1648792 A	17-11-1992
			CA 2085978 A	23-10-1992
			WO 9218193 A	29-10-1992
			EP 0535204 A	07-04-1993
			JP 5509254 T	22-12-1993
US 4161177	A	17-07-1979	CH 596843 A	31-03-1978
			AT 356798 B	27-05-1980
			AT 45477 A	15-10-1979
			FR 2340741 A	09-09-1977
			SE 424603 B	02-08-1982
			SE 7701442 A	13-08-1977
US 3906946	A	23-09-1975	DE 2305896 A	15-08-1974
			FR 2215977 A	30-08-1974
			GB 1458310 A	15-12-1976
			IT 1002864 B	20-05-1976
			JP 50047482 A	26-04-1975
			SE 398712 B	16-01-1978
FR 1336357	A	16-12-1963	BE 620748 A	
			CH 400463 A	
			DE 1273749 B	
			DK 117094 B	16-03-1970
			DK 113314 B	10-03-1969
			GB 951718 A	
			NL 281166 A	
			NL 6613932 A	27-12-1966
US 5356381	A	18-10-1994	US 3385553 A	28-05-1968
			US 5057084 A	15-10-1991
			US 5053013 A	01-10-1991
			US 5180365 A	19-01-1993
			US 5226879 A	13-07-1993
			AT 147644 T	15-02-1997
			AU 645803 B	27-01-1994
			AU 7674791 A	18-09-1991
			CA 2053251 A,C	02-09-1991
			DE 69124164 D	27-02-1997
			DE 69124164 T	07-08-1997
			EP 0471837 A	26-02-1992
			ES 2099745 T	01-06-1997
			WO 9112838 A	05-09-1991
			US 5352204 A	04-10-1994
			US 5350360 A	27-09-1994
			US 5417656 A	23-05-1995
			US 5476451 A	19-12-1995
			US 5554117 A	10-09-1996
			US 5556381 A	17-09-1996
			US 5527278 A	18-06-1996
			US 5531684 A	02-07-1996
			US 5520643 A	28-05-1996
			US 5527277 A	18-06-1996
			US 5503630 A	02-04-1996
			US 5542923 A	06-08-1996
			US 5607393 A	04-03-1993
			US 5792123 A	11-08-1998
			US 5281199 A	25-01-1994

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/US 99/07867

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5356381 A		US 5263930 A	23-11-1993
		IE 64960 B	20-09-1995
		AU 653662 B	06-10-1994
		AU 3050492 A	15-07-1993
		CA 2086484 A	11-07-1993
		DE 69224892 D	30-04-1998
		DE 69224892 T	17-09-1998
		EP 0551017 A	14-07-1993
		ES 2113930 T	16-05-1998
		JP 6142210 A	24-05-1994